

# 14GP Heavy Duty Pipe Top Gooseneck Lowboy

|                            |   |                      |   |
|----------------------------|---|----------------------|---|
| <b>G.V.W.R.</b>            | 14,000#                                     | <b>Axle</b>          | (2) 7,000#, EZ Lube w/Electric Brakes   |
| <b>G.A.W.R. (Ea. Axle)</b> | 7,000#                                      | <b>Supension</b>     | Multi-Leaf Slipper Spring w/Equalizer   |
| <b>Coupler</b>             | 2-5/16" Ball Adjustable Pipe                | <b>Tire</b>          | ST235/80 R-16 Load Range E  |
| <b>Safety Chains</b>       | 3/8" Grd. 70 w/Safety Latch Hook (2 ea)     | <b>Wheel</b>         | 16" x 6"; Heavy White Mod 8 Bolt  |
| <b>Jack</b>                | 12,000# Drop Leg Jack- Side Wind            | <b>Floor</b>         | 2" Treated Pine or Douglas Fir*   |
| <b>Neck</b>                | 10" I-Beam                                  | <b>Lights</b>        | L.E.D. D.O.T. Stop, Tail, Turn & Clearance  |
| <b>Top Rail</b>            | 3" Square Tubing                            | <b>Elec. Plug</b>    | 7-Way RV  |
| <b>Frame</b>               | 5" x 3" x 5/16" Angle                       | <b>Finish (Prep)</b> | Steel is Cleaned to Ensure a Professional Smooth Finish.                          |
| <b>Crossmembers</b>        | 3" Channel on 16" Centers                   |                      |   |
| <b>Uprights</b>            | 15" Tall, 3" x 2" x 3/16" Angle             | <b>Finish</b>        | Superior Quality Finish is Applied for a Highly Decorative and Protective Finish. |
| <b>Fenders</b>             | 9" x 72" Double Broke Diamond Plate w/ Back |                      |   |


\* Douglas Fir Available from Caldwell, ID Facility Only

## Standard Features

- Gooseneck with 2-5/16" Adjustable Pipe Coupler
- 12,000# Drop Leg Jack - Sidwind
- (4) Tie Down Pockets on Outside Frame
- EZ Lube Hubs
- Dexter Brand Axles
- Nev-R-Adjust Electric Brakes on All Hubs
- Cambered Axles
- Heavy Duty 3" Square Tube Top Rail
- Double Broke Diamond Plate Fenders
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Protected Wiring
- Spare Tire Mount (Top of Neck)
- 4' Slide-In Ramps (Channel)
- Complete Break-A-Way System w/Charger
- Radial Tires

## Description

| Dimensions |      |      |     |
|------------|------|------|-----|
| Length     | A    | B    | C   |
| 20'        | 240" | 160" | 80" |
| 24'        | 288" | 192" | 96" |

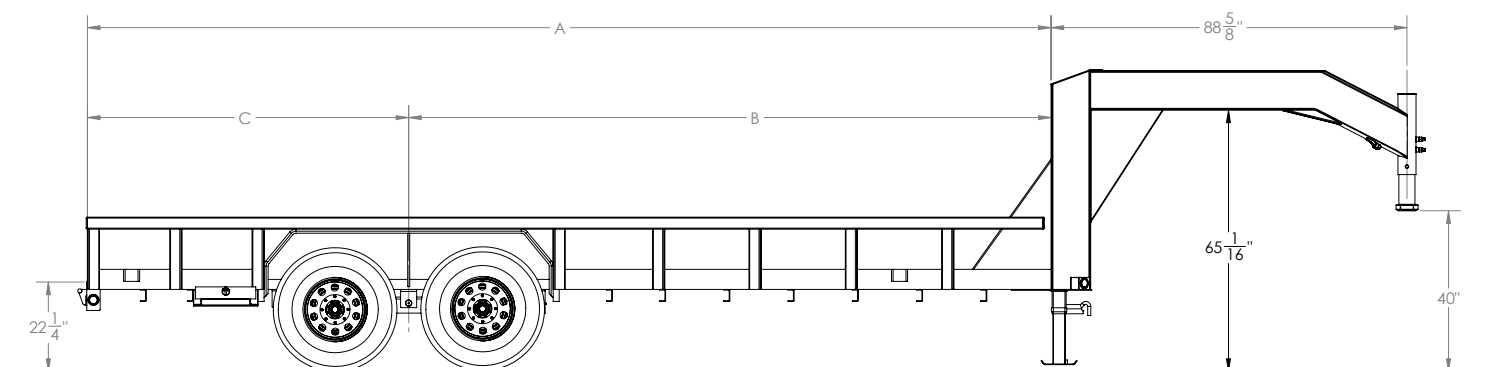

# 14GP Heavy Duty Pipe Top Gooseneck Lowboy ●



| Model   | Weight* | Description  |
|---------|---------|--|
| 14GP-20 | 3,450#  | 83" x 20' HD Gooseneck Tandem Axle Pipe Top Lowboy |
| 14GP-24 | 3,850#  | 83" x 24' HD Gooseneck Tandem Axle Pipe Top Lowboy |

\*Weights shown are for base models without options and are estimates only

## Optional Equipment

| Category      | Description   |
|---------------|---|
| BRAKES        | Electric Over Hydraulic Brakes (Drum)   |
| JACKS         | Dual 12,000# Drop Leg Jacks   |
| TIRE/WHEEL    | Spare Tire (ST235/80 R-16 LR-E)   |
| TIRE/WHEEL    | Tire Upgrade (ST235/85 R-16 LR-G)   |
| TIRE/WHEEL    | Spare Tire Upgrade (ST235/85 R-16 LR-G)   |
| RAMPS         | 5' Stand up Ramps in Lieu of Slide In   |
| RAMPS         | 4' Heavy Duty Integrated Ramp Gate w/Gas Shock Assist in Lieu of Ramps              |
| RAMPS         | 5' Heavy Duty Integrated Ramp Gate w/Gas Shock Assist in Lieu of Ramps (Split Gate) |
| BODY          | Enclose Sides w/ Expanded Metal (Per Square Foot)                                   |
| BODY          | Enclose Sides w/ Sheet Metal (Per Square Foot)                                      |
| BODY          | 2' High Sides (Open)  |
| BODY          | 3' High Sides (Open)  |
| BODY          | 4' High Sides (Open)  |
| BODY          | 1/8" Diamond Plate Steel Floor (Per Square Foot)                                    |
| CARGO CONTROL | Lockable Tool Box Between Gooseneck Risers (Dual Jacks Required)                    |
| CARGO CONTROL | Additional Tie Down Pockets (Each)  |
| CARGO CONTROL | B40 5/8" D-Ring (Each)  |